


Icu	55KA	66KA	66KA
Size	Eco	I	II
Size available			
400 A	0	I	
630 A	0	I	II
800 A	0	I	II
1000A	0	I	II
1250 A	0	I	II
1600 A	0	I	II
2000 A			II
2500 A			II
3200 A			II
3800 / 4000 A			II

Motor and Closing Solenoid	
K	110 -125 VAC/DC
U	220 -240 VAC/DC

1st Auxiliary release	
SH	F 110 -125 VAC/DC
	G 220 -240 VAC/DC
UVR	M 110 -125 VAC/DC
	N 220 -240 VAC/DC
UVR	U 110 -125 VAC/DC
w/delay	V 220 -240 VAC/DC

2nd Auxiliary release		
SH	2 110 -125 VAC/DC	2NO+2NC
	3 220 -240 VAC/DC	2NO+2NC

Size	Eco	I	II
3 Poles	0	1	2
4 Poles	4	5	6

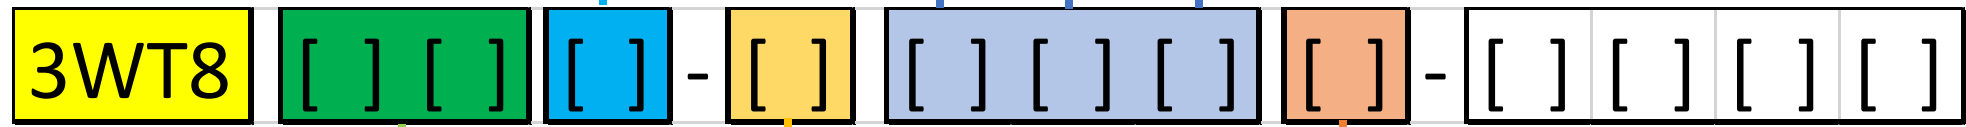

Other option please see catalog LV35

Rated Current	
04	400 A
06	630 A
08	800 A
10	1000A
12	1250 A
16	1600 A
20	2000 A
25	2500 A
32	3200 A
40	4000 / 3800 A
Unrestricted	

ETU Selection	Function	L	S	I	N	G
5	ETU 35WT	LSI	A	A	F	
6	ETU 37WT	LSING	A	A	F	F
7	ETU 45WT	LSIN	A	A	A	
8	ETU 47WT	LSING	A	A	A	A

Communication available

[A] [A] [0]
For Manual operation

Connection option	
Withdrawable version	
4	Horizontal Main
6	Vertical Main
Fix version	
0	Horizontal Main
2	Vertical Main / Only 4000A

[5] [A] [A] [2]

For Withdrawable breaker

[0] [A] [A] [2]

For Fix type breaker

		Frame		
[]	Class	I	II	III
2	N	55KA	66KA	
3	S	66KA	85KA	
4	H	85KA	100KA	100KA
5	C		130KA	150KA(3P) /130KA(4P)

Pole	
[]	
6	3 poles
7	4 poles

Motor and Closing coil	
1	Manual operate
4	220-240 VAC/DC
5	110-125 VAC/DC

1st releasing coil	
A	w/o 1st release
F	110-125 VAC/DC
G	220-240 VAC/DC

2nd Releasing coil		
	A	w/o 2nd release
SH	F	110-125 VAC/DC
	G	220-240 VAC/DC
UVR	M	110-125 VAC/DC
	N	220-240 VAC/DC
UVR	R	110-125 VAC/DC
w/ delay	S	220-240 VAC/DC

Auxiliary contact	
2	2NO + 2NC
4	4NO + 4NC
7	6NO + 2NC
8	5NO + 3NC



Frame	[]	[]	[]	Rated current	[] []
	I			630A	06
	I	II		800A	08
	I	II		1000A	10
	I	II		1250A	12
	I	II		1600A	16
	I	II		2000A	20
		II		2500A	25
		II		3200A	32
		II	III	4000A	40
			III	5000A	50
			III	6300A	63

	ETU	[]	[]	L	S	I	N	G
W/O Ground Fault								
LI	15B	B	B	a	f		a	
LSI	25B	C	B	a	f	a	a	
LSIN	45B	E	B	a	a	a	a	
LSIN 4L-DP	45B+Disp	F	B	a	a	a	a	
LSIN GP-DP	76B	N	B	a	a	a	a	
With Ground Fault								
LSING	27B	D	G	a	f	a	f	f
LSING	45B	E	G	a	f	a	a	a
LSING 4L-DP	45B+Disp	F	G	a	f	a	a	a
LSING GP-DP	76B	N	G	a	f	a	a	a

Connection	
Fix type breaker	
1	Vertical main
2	Horizontal main
3	Front main, Single hole
4	Front main, double hole
Withdrawable breaker	
6	Horizontal main
7	Vertical main
8	Connection flange
Without guild frame	
5	W/O guild frame

Recommend Option -Z :

T40 : Door sealing frame | C22: Ready to close signal | K07: Trip signal switch